



July 1, 2026

Sussex Square Condominium Council, Inc
8368 Norwood Dr
Millersville, MD 21108
ATTN: Nelda Fink

RE: Bearing Wall Determination

Nelda,

At your request, I provided a structural inspection of the wall between the kitchen and family room at 8372 Norwood Dr, Millersville, MD 21108. You explained several owners in the community have removed the same wall and you wanted further evaluation by a structural engineer. Since the 2x10 joists supporting the second floor are bearing on the wall, I can confirm that the wall is a load bearing wall and needs to have a beam installed if removed.

If you have any questions or concerns, don't hesitate to contact me further.

Sincerely,


A handwritten signature in blue ink, appearing to read "Greg Naylor", with a stylized flourish at the end.

Greg Naylor, P.E



07/01/2026

"Professional Certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional engineer under the laws of the State of Maryland, License No. 41431, Expiration Date: 01-05-2028"

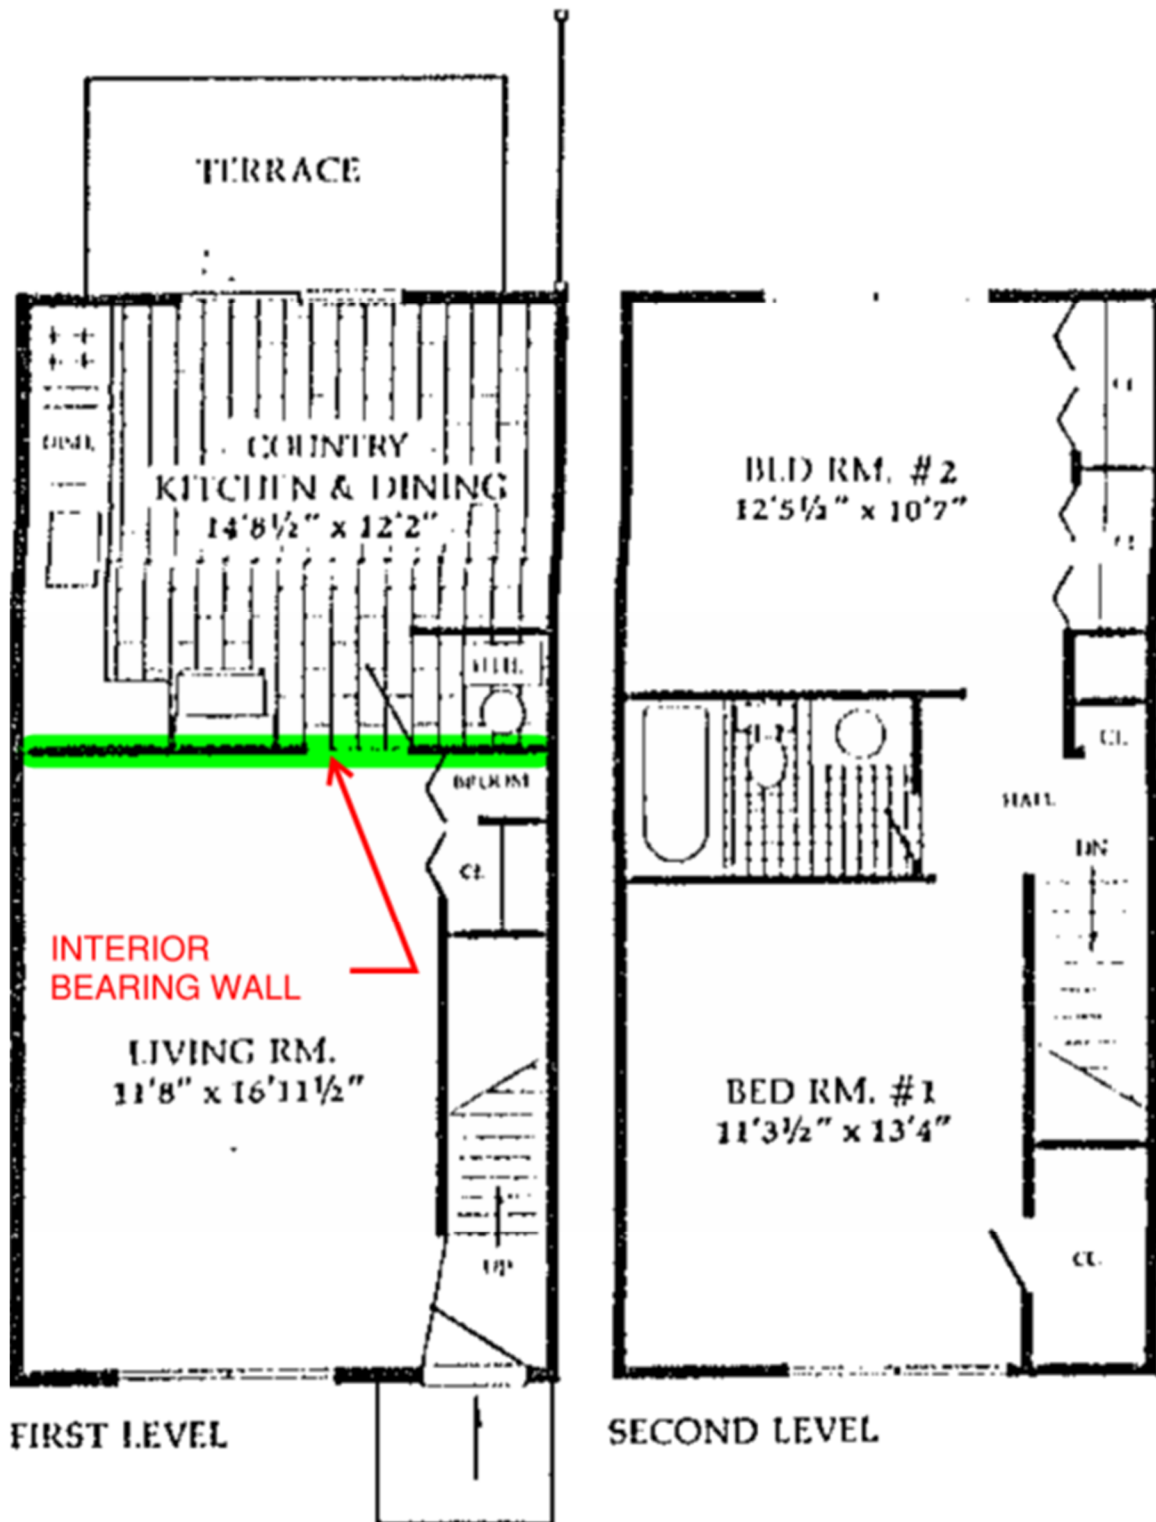

Floor Plan



Front of House



Bearing Wall



Joists Bearing on Top of Wall